

Introducing the X5

more than vanilla

superior content

- Cloud
- Popular Services
- Wireless
- Beaming Content

better performance

- All Digital
- High-Performance Amp
- Lossless Synchronization
- Premium Audio Connectors


real control

- 3rd Party Control
- IR
- Keypads
- Apps

The first wireless system with audiophile sound and whole-house flexibility



Rusound X5 wireless streamer / controller / amplifier



www.rusound.com/xstream



Use X5 and My Russound to control your TV




Improved reception and better performance

Bluetooth

BTC-1X

Acclaim Speakers

X1 Expand your options

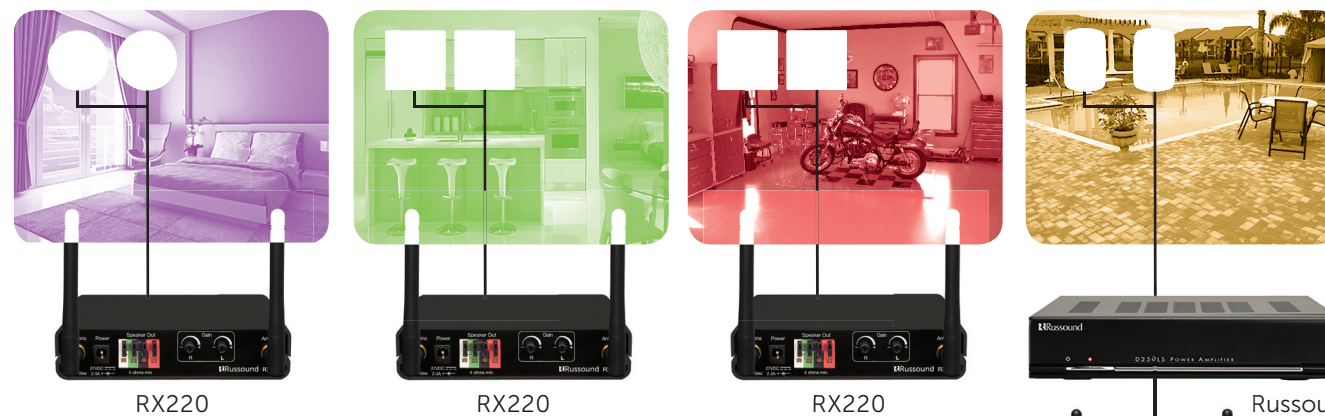

RX220

RX220

RX220

Russound Amplifier

RX2

with the X1

three small but powerful devices can make walls disappear and long wire runs obsolete.

- TX8 Transmitter
- RX220 Amp / Receiver
- RX2 Pre-Amp / Receiver



DMS 3.1

wireless control via smartphone or tablet, using My Russound app

PANDORA internet radio

tunein

SiriusXM INTERNET RADIO

vTuner

AirPlay

integration protocol

USB






CUSTOM WIRELESS SOLUTIONS

There's wireless. And then there's **whole house wireless** for professional installers.
 A true wireless **solution** is more than just a streamer. Real wireless for the **custom market** takes all of the expected features and adds new dimensions of control and audio integrity. Packaged in a series of interconnectable devices worthy of the audio everywhere label. Now that's **XStream™**.








Acclaim Thin Bezel Speakers - Specifications

Angled models - 15° two-way, in-ceiling

Model	Cone Material	Tweeter Material	Recommended Power	Frequency Response	Sensitivity	Mounting Depth
 RSA-61 (each)	Polypropylene	PEI	5-80 watts	50Hz - 20kHz	90dB @ 1w/1m	4.28" (10.87 cm)
 RSA-62 (each)	IMPP Ribbed	Silk	5-100 watts	45Hz - 20kHz	90dB @ 1w/1m	4.4" (11.18 cm)
 RSA-63 (each)	Kevlar	Teteron	5-120 watts	40Hz - 20kHz	90dB @ 1w/1m	4.56" (11.58 cm)

Flat models - two-way, in-ceiling, in-walls

Model	Cone Material	Tweeter Material	Recommended Power	Frequency Response	Sensitivity	Mounting Depth
 RSF-61 (pair)	Polypropylene	PEI	5-80 watts	50Hz - 20kHz	88dB @ 1w/1m	3.49" (8.86 cm)
 RSF-62 (pair)	Polypropylene	Silk	5-90 watts	50Hz - 20kHz	90dB @ 1w/1m	3.49" (8.86 cm)
 RSF-63 (pair)	IMPP Ribbed	Silk	5-100 watts	40Hz - 20kHz	90dB @ 1w/1m	3.53" (8.97 cm)
 RSF-64 (pair)	Kevlar	Teteron	5-120 watts	40Hz - 20kHz	90dB @ 1w/1m	3.69" (9.37 cm)
 RSF-61T (each)	IMPP Ribbed	Silk	5-120 watts	40Hz - 20kHz	90dB @ 1w/1m	3.69" (9.37 cm)

Magnetic grilles:



Additional Common Specifications:

Woofer size: 6.5" (16.51 cm)
 Nominal Impedance: 8 ohms
 Overall Dimensions: 9.13" (23.19 cm)
 Cut-out Dimensions: 8.375" (21.27 cm)

WIRELESS audio everywhere



#LR9910-0048

5 Forbes Road Newmarket, NH 03857 1.800.638.8055 www.russound.com